

Q 2753 #5

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

JOSEPHUS J. BRAAT

Serial No. 09/332,212

Filed: JUNE 14, 1999



Atty. Docket

PHN 16,982

Group Art Unit 2753

Ex.

DEVICE FOR SCANNING AN OPTICAL RECORD CARRIER  
Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

IC 2700 MAIL ROOM

RECEIVED  
AUG 17 1999

CLAIM FOR PRIORITY

Sir:

A certified copy of the EUROPEAN Application No. 98202015.8 filed JUNE 16, 1998 referred to in the Declaration of the above-identified application is attached herewith.

Applicant claims the benefit of the filing date of said EUROPEAN application.

Respectfully submitted,

AUGUST 9, 1999  
Enclosure

By Michael E. Belk  
Michael E. Belk, Reg. 33,357  
Attorney  
(914) 333-9643

CERTIFICATE OF MAILING

It is hereby certified that this correspondence is being deposited with the United States Postal Service as first-class mail in an envelope addressed to:  
COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231


On 8/11/99  
By Michael E. Belk

ML09BEG0.SW0

**THIS PAGE BLANK (USPTO)**



Eur päisches  
Patentamt



Eur pean  
Patent Office

Office eur péen  
des brevets

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

TC 2700 MAIL ROOM

AUG 17 1999

RECEIVED

Patentanmeldung Nr. Patent application No. Demande de brevet n°

98202015.8

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

*Arlotte Fiedler*

A. Fiedler

MÜNCHEN, DEN  
MUNICH,  
MUNICH, LE

28/07/99

**THIS PAGE BLANK (USPTO)**



**Eur päisches  
Patentamt**

**Eur pean  
Patent Office**

**Office eur péen  
des brevets**

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: **98202015.8**

Anmeldetag:  
Date of filing:  
Date de dépôt: **16/06/98**

Anmelder:  
Applicant(s):  
Demandeur(s):  
**Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS**

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
**Device for scanning an optical record carrier**

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

PIIN 16.982

1

15.06.1998

**Device for scanning an optical record carrier**

The invention relates to a device for scanning a surface comprising optically detectable marks along a scan line, which device comprises a radiation source for emitting a radiation beam, an objective system for guiding the radiation beam to the surface, a radiation-sensitive detection system for receiving radiation from the surface and an electronic circuit for processing output signals of the detection system.

The measurement of optical aberrations has recently become relevant in the field of optical recording, in particular the measurement of spherical aberration. The information density on optical record carriers may be increased by increasing the numerical aperture (NA) of the radiation beam used for reading and writing information on the record carrier. The record carriers are often scanned through a transparent layer protecting the information layer of the record carrier. A small variation of the thickness of the transparent layer causes a substantial change in the spherical aberration incurred by a high-numerical aperture radiation beam traversing the transparent layer. This spherical aberration may be reduced by using a dual lens objective system. Such a system has a first lens and a second lens, the second lens being a plano-convex lens arranged between the first and lens and the record carrier, and a small spacing between the plano surface and the record carrier. In some applications the plano-convex lens is referred to as a solid immersion lens.

The article "High density optical disk system using a new two-element lens and a thin substrate disk" by F. Maeda et al, published in the proceedings of ISOM96 p. 342-344 discloses an optical recording system having such a dual-lens objective system. The spherical aberration due to variations in the thickness of the transparent layer are compensated by changing the axial position of the plano-convex lens of the objective system. The system determines the spherical aberration in the beam reflected from the record carrier and uses this value to position the plano-convex lens. The spherical aberration is determined from the shape of the focus error signal as a function of the focus error. The axial position of the plano-convex lens is optimized to obtain the desired shape. The

PHN 16.982

2

15.06.1998

method has as a disadvantage that the shape of the focus error signal as a function of the focus position must be analysed, which requires wobbling the objective system through the point of best focus. During wobbling the reading and writing performance of the optical disk system is reduced.

- 5 It is an object of the invention to provide an aberration detection system that does not have the above disadvantages. It is another object of the invention to provide a device forming a more accurate focus error signal.

This object is met by a device as described in the preamble, which device is characterized according to the invention in that the detection system comprises a plurality of  
10 detectors, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and for generating from the time difference a signal representing a wavefront aberration of the radiation beam.

- 15 The invention is based on the insight that different rays within the radiation beam will behave differently when the wavefront of the radiation beam deviates from the shape required for forming a proper focal spot on the surface. Such a deviation occurs when the beam is affected by optical aberrations. In particular, the position at which a ray is incident on the surface or information layer depends on the position of the ray in the pupil of the  
20 beam. A ray which impinges on the information layer ahead of the central part of the focal spot will experience the presence of a mark in the layer earlier than the rays forming the central part of the focal spot. It turns out that a suitable division of the detection system in detectors allows measurement of the time difference between the rays coming from the surface. The different detectors will determine different passage times for leading and  
25 trailing edges of the marks. A measurement of the time difference between the detector output signals of the occurrence of a particular feature of the surface, such as a leading or trailing edge of a mark, allows a determination of the primary optical aberrations.

- The second object of the invention is met by a device as described in the preamble, which device is characterized according to the invention in that the detection system com-  
30 prises eight detectors arranged in four quadrants, each quadrant being split at a radius in an inner part and an outer part, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over



PHN 16.982

3

15.06.1998

one of the marks and for generating from the time difference a focus error signal.

Since the device measures time differences in the scan direction, the wavefront of the beam must deviate from spherical in a plane containing both the axis of the beam and the scan line in order to measure non-zero time differences. Defocus, spherical aberration and tangential coma are examples of wavefront deviations that can be measured when scanning along the scan line. Other wavefront deviations, such as transverse coma, can be determined by the same method if the focal spot is wobbled in a direction transverse to the scan line and the detection system has a dividing line substantially parallel to the scan line. A measurement of the defocus in two directions allows the determination of the value of astigmatism.

10 The invention further relates to a method for determining the focus error and the optical aberrations from a time or phase measurement.

The invention also relates to a record carrier having specific patterns of marks located at specified parts of the tracks.

15 It is remarked that US patent no. 4,051,527 describes a device that measures time differences between output signals of detectors and uses these differences to form a signal indicative of the distance between the centre of the focal spot and the track to be followed. In contrast to the present invention, the signal of the known device is relatively insensitive to wavefront deviations of the radiation beam.

20

The invention will now be described by way of example and with reference to the accompanying drawings, in which

Figure 1A and 1B show a radiation beam affected by coma and spherical aberration, respectively, incident on a surface,

25 Figure 2 shows a device for scanning a surface according to the invention,

Figure 3 shows a circuit for forming a focus error signal,

Figure 4 shows a layout of a detection system, and

Figures 5A and 5B show a record carrier according to the invention.

30

The principle of the aberration measurement will be explained with reference to Figures 1A and 1B. Figure 1A shows an unaberrated wavefront 1 of a radiation beam and a wavefront 2 aberrated by coma. Rays of the unaberrated wavefront, indicated in the Figure

PHN 16.982

4

15.06.1998

by drawn lines, intercept a surface 3 in point 4 when the radiation beam is properly focussed on the surface. Rays 5, 6, 7 and 8 of the comatic wavefront, indicated by dashed lines, intercept the surface at different points 9, 10, 10, 9, respectively, depending on the slope of the part of the wavefront pertaining to a ray. When the radiation beam moves over the surface along a scan-line from left to right in the Figure, a leading edge 11 and trailing edge 12 of a mark 13 in the form of a depression in the surface will be observed sooner by the rays intercepting surface 3 at point 9 than by the rays intercepting at point 10. When the different parts of the wavefront are intercepted by different detectors, the detectors will observe different passage times for a feature of the mark such as the leading or trailing edge. The passage times depend on the type of aberration of the radiation beam. Figure 1B shows a situation similar to the one of Figure 1A, wherein the radiation beam suffers from spherical aberration instead of coma.

Figure 2 shows a device for scanning a surface in the form of an optical record carrier 21, in which device the measurement method of aberration according to the invention has been implemented. The record carrier comprises a transparent layer 22, on one side of which an information layer 23 is arranged. The side of the information layer facing away from the transparent layer is protected from environmental influences by a protection layer 24. The side of the transparent layer facing the device is called the entrance face 25. The transparent layer 22 acts as a substrate for the record carrier by providing mechanical support for the information layer. Alternatively, the transparent layer may have the sole function of protecting the information layer and have a thickness in the range from 100 nm to 100 µm, or the transparent layer may be absent altogether. In these cases the mechanical support function for the record carrier is taken over by protective layer 24 or by a further information layer and transparent layer connected to the information layer 23. Information may be stored in the information layer 23 of the record carrier in the form of optically detectable marks arranged in substantially parallel, concentric or spiral tracks, not indicated in the Figure. The marks may be in any optically readable form, e.g. in the form of pits, or areas with a reflection coefficient or a direction of magnetization different from their surroundings, or a combination of these forms.

The scanning device comprises a radiation source 26, for example a semi-conductor laser, emitting a diverging radiation beam 27. A beam splitter 28, for example a

PHN 16.982

5

15.06.1998

semi-transparent plate, reflects the radiation towards a lens system. The lens system comprises a collimator lens 29, and an objective system comprising a first lens 30 and a second lens 31. Collimator lens 29 changes the diverging radiation beam 27 to a collimated beam 32. First lens 30, having an optical axis 33, transforms collimated radiation beam 32 into a converging beam 34 incident on lens 31. Collimator lens 29 and first lens 30 may be combined into a single lens. Second lens 31 changes incident beam 34 into a converging beam 35, which comes to a focus spot 36 on information layer 23. Second lens 31 in the embodiment of the Figure is a plano-convex lens. Its planar surface faces transparent layer 22 and forms a gap between the lens and the layer. The planar surface may have an aspherical profile to compensate for optical aberrations. Although objective lens 30 is indicated in the Figure as a single lens element, it may comprise more elements, and may also comprise a hologram operating in transmission or reflection, or a grating for coupling radiation out of a waveguide carrying the radiation beam. Radiation of converging beam 35 reflected by information layer 23 forms a reflected beam 37, which returns on the optical path of forward converging beam 34. First lens 30 and collimator lens 29 transform reflected beam 37 to a converging reflected beam 38, and beam splitter 28 separates the forward and reflected beams by transmitting at least part of reflected beam 38 towards a detection system 39. The detection system captures the radiation and converts it into one or more electrical detector signals 40. The detector signals are processed in an electronic circuit 41 in order to derive various signals from them. One of these signals is an information signal 42, the value of which represents the information read from the information layer 23. Another signal is a focus error signal, the value of which represents the axial difference in height between focus spot 36 and information layer 23. The focus error signal is used as input for a servo controller 43, which controls the positions of first lens 30 and/or second lens 31, thereby controlling the axial and transverse position of focus 36 spot such that it coincides substantially with the plane of information layer 23 and the centre of tracks on record carrier 21 to be followed by focus spot 36.

Beam splitter 28 may also be a grating, which passes in transmission radiation beam 27 from radiation source 26, and deflects part of reflected beam 38 towards detection system 39. In that case radiation source 26 and detection system 39 may be arranged close together on one side of the grating.

PIIN 16.982

6

15.06.1998

Detection system 39 is arranged in the far field of information layer 23, i.e. the detection system is located in a plane where the various diffraction orders of the beam from the information layer are sufficiently separated, in other words, in a plane which is disposed sufficiently far from the image of the information layer formed by objective system 30, 31 and collimator lens 29. Figure 2 shows a plan view of the detection system. The detection system comprises two concentric detectors split along a dividing line 50, giving two inner detectors 51, 52, and two outer detectors 53 and 54. The direction of the dividing line is perpendicular to the effective track direction. The effective track direction is the direction of the track currently being scanned on the record carrier as seen on the detection system through the optics between the detection system and the information layer comprising the track. The diameter of the inner detectors depends on the radius of the spot formed by radiation beam 38 on the detector surface. The diameter is preferably in a range from 50% to 80% of the spot diameter, and more preferably about 70%.

Figure 3 also shows part of electronic circuit 41 for deriving aberration signals from the detector signals. The detector signals are connected to an adder 55, giving an output signal representing the total radiation intensity incident on detection system 39, and thereby the information stored in the marks of the record carrier. A clock extractor 56, in the form of a phase-locked loop, derives a clock signal  $S_c$  from the output signal of adder 55. The clock signal is used in a circuit 57, which recovers the high-frequency or binary information signal  $S_i$  from the output signal of adder 55. Clock signal  $S_c$  is fed into timing units 58, 59, 60 and 61. Timing unit 58 determines the time difference  $t_a$  between a leading edge of a mark in the signal from detector 53 and the corresponding edge of the clock signal. Likewise, timing units 59, 60 and 61 determine the time differences  $t_b$ ,  $t_c$  and  $t_d$  between a leading edge of the same mark in the signal from detectors 52, 53 and 54, respectively, and the same edge of the clock signal  $S_c$ . A circuit 62 combines the output signals of timing units 58 to 61 and forms a signal  $S_{ab}$  equal  $t_a - t_b - t_c + t_d$ , representing the spherical aberration in the radiation beam. A circuit 63 also combines the output signals of timing units 58 to 61 and forms a signal  $S_{co}$  equal  $t_a - t_b + t_c - t_d$ , representing the coma in the radiation beam. A circuit 64 forms a signal  $S_f$  from the output signals of timing circuits 58 to 61, which signal is equal to  $t_a + t_b - t_c - t_d$ , representing the focus error, i.e. the axial distance between focus spot 36 and information layer 23.

The output signals of circuit 41 may have a small offset, which can be compensated for in practice by tuning focus, spherical aberration and coma for minimum jitter in informa-

PHN 16.982

7

15.06.1998

tion signal  $S_i$ .

Circuit 10 may select particular patterns on the record carrier having advantageous properties. An example of a special pattern is one that is in phase with identical patterns in neighbouring tracks. The reading of such patterns is not affected by low-frequency cross-talk from the neighbouring tracks. The patterns are present in headers of sectors dividing the information layer in small storage units.

In another embodiment, circuit 10 selects patterns having marks with periods of approximately  $\lambda/NA$  and  $3\lambda/NA$  from the spectrum of patterns obtained when reading information from the record carrier and use these patterns for the determination of the signals  $S_m$ ,  $S_\infty$  and  $S_r$ . However, in a preferred embodiment of the optical player the electronic circuit comprises a circuit 65, that establishes an enabling signal for timing units 58, 59, 60 and 61 from information signal  $S_i$ . The record carrier for this player comprises, at specified locations, two patterns of marks at two different spatial frequencies. Circuit 65 sends an enabling signal to the timer units when the radiation beam is at the specified locations. Circuits 62, 63 and 64 are modified each to form two differences of the outputs of the timing units, one for each of the two patterns. A focus error signal at an output of circuit 64 is proportional to the difference signal of said two differences. This focus error signal is relatively independent of the type of the record carrier. Circuit 64 may be followed by a low-pass filter to remove the high-frequency components from the output signal before it is fed into servo circuit 43.

It will be clear that the focus error and aberration signals may also be formed by determining the time difference between each of the four outputs of detectors 51, 52, 53 and 54 and subsequently making the required combination of the time differences. Instead of through determination of time differences or delays, the focus error signal may also be obtained through measurement of phase differences between the detector signals and the clock signal or between the detector signals themselves.

Figure 4 shows another embodiment 67 of the detection system. The detection system has two perpendicular dividing lines 68 and 69 and a circular dividing line 70. Dividing line 69 is parallel to the effective track direction. Alternatively, dividing line 69 may be rotated over  $45^\circ$ . The diameter of the circular line is similar to the one of detection system 39. The outer part of the detection system comprises four detectors 71 to 74, having detector signals a1 to d1. The inner part of the detection system comprises also four detectors 75 to 78, having detector signals a2 to d2. The time differences between the detector

PHN 16.982

8

15.06.1998

signals can be determined in the same way as for the detector signals in the embodiment shown in Figure 3. The signal  $S_{sa}$ ,  $S_{co}$ , and  $S_f$  representing the spherical aberration, coma and defocus, respectively, present in the radiation beam, are derived as

$$S_{sa} = (t_{a1} + t_{d1}) - (t_{a2} + t_{d2}) + (t_{b2} + t_{c2}) - (t_{b1} + t_{c1})$$

$$S_{co} = (t_{a1} + t_{d1}) - (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) + (t_{b1} + t_{c1})$$

$$S_f = (t_{a1} + t_{d1}) + (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) - (t_{b1} + t_{c1}),$$

10

where  $t_{a1}$  is the time difference between the detector signal a1 of detector 71 and the clock signal  $S_c$ . The slope of the delay in units of  $\lambda/NA$ , corresponding to signal  $S_{sa}$ , as a function of the value of the spherical aberration in units of  $\lambda$  rms OPD in the radiation beam is approximately equal to  $4/NA$ . The focus error signal  $S_f$  derived according to the above equation is relatively insensitive to differences between record carriers of different type. A comparison of the time differences at two distinct spatial frequencies is not needed.

15

Since the device measures time differences in the scan direction, the wavefront of the beam must deviate from spherical in a plane containing both the axis of the beam and the scan line in order to measure non-zero time differences. Defocus, spherical aberration and tangential coma are examples of wavefront deviations that can be measured when scanning along the scan line. Other wavefront deviations, such as transverse coma, can be determined by the same method if the focal spot is wobbled in a direction transverse to the scan line and the detection system has a dividing line substantially parallel to the scan line. A radial wobble of the radiation beam may be effected by injecting a wobble signal in the part of servo circuit 43 controlling the radial servo. The detector signals should be connected to the timing units in a way corresponding to the different direction of motion. A measurement of the defocus in two directions allows the determination of the value of astigmatism

20

25

Figure 5A shows a top view of a record carrier according to the invention, which is particularly suitable for use by a device comprising an electronic circuit as shown in Figure 3. The tracks along which the device scans the information are circular or spiral. Only one track 26 is shown in the Figure. Figure 5B shows an enlargement of part of track 26. At fixed angular positions 27 each track comprises a pattern of marks having a spatial frequency in the range from 0.35 to 0.5 times the cut-off frequency of the objective system. At

30

PHN 16.982

9

15.06.1998

other locations 28 each track comprises a pattern of marks having a spatial frequency in the range from 0.14 to 0.2 times the cut-off frequency. The patterns preferably have a period of  $3\lambda/NA$  and  $1\lambda/NA$ . These positions are sensed by circuit 24 shown in Figure 10 and, subsequently, the patterns at these positions are used to derive a value of the focus error signal. To reduce the effects of cross-talk between neighbouring tracks on the determination of the focus error signal, the patterns in neighbouring tracks are preferably in phase. The patterns may form part of headers in which address information is stored. The patterns may form so-called VFO fields, i.e. fields used for generating a periodic signal to lock an oscillator to.

10 Since the capture range of the focus servo using the above focus error signal is relatively small, the device should preferably derive a focus error signal from the low-frequency components of the detector signals, which has a substantially larger capture range. When the focal spot is at a large distance from the information layer, the low-frequency-derived focus error signal is used, and close to the information layer, servo circuit 15 11 gradually switches over to the high-frequency derived focus error signal. European patent application no. 812 457 describes several ways to derive a focus error signal from the low-frequency components of the detector signals and implementations of the gradual switch-over.

The radial tracking error signal  $S_r$  may be derived in known ways. Preferred methods 20 are the push-pull method, known from inter alia US patent no. 4,057,833, and the differential time detection method, disclosed in US patent no. 4,785,441.

PHN 16.982

10

15.06.1998

CLAIMS:

1 A device for scanning a surface comprising optically detectable marks along a scan  
line, which device comprises a radiation source for emitting a radiation beam, an objective  
5 system for guiding the radiation beam to the surface, a radiation-sensitive detection system  
for receiving radiation from the surface and an electronic circuit for processing output  
signals of the detection system, characterized in that the detection system comprises a  
plurality of detectors, each detector having an output for providing a detector signal, and in  
that the device comprises an electronic circuit for forming a time difference between corre-  
10 sponding parts of the detector signals relating to passage of the radiation beam over one of  
the marks and for generating from the time difference a signal representing a wavefront  
aberration of the radiation beam.

2 Device according to Claim 1, the detection system comprises four consecutive sub-  
15 detectors a, b, c and d in the direction of the scan line, and the signal representing tangential  
coma is proportional to  
$$t(a-b) - t(c-d),$$
  
where  $t(n-m)$  is the time difference between detector signals of sub-detectors m and n.

20 3 Device according to Claim 1, the detection system comprises four consecutive sub-  
detectors a, b, c and d in the direction of the scan line, and the signal representing spherical  
aberration is proportional to  
$$t(a-b) + t(c-d),$$
  
where  $t(n-m)$  is the time difference between detector signals of sub-detectors m and n.

25

4 Device according to Claim 1, wherein the detectors are arranged at both sides of a  
dividing line, extending effectively in a direction perpendicular to the scan line.

5 Device according to Claim 1, wherein the detectors are arranged at both sides of a  
30 dividing line, extending effectively in a direction perpendicular to the scan line, and compris-  
ing a servo circuit arranged for wobbling the position of the radiation beam in a direction  
perpendicular to the scan line.



PHN 16.982

11

15.06.1998

6 Device according to Claim 1 arranged for scanning optical record carriers.

7 A device for scanning a surface comprising optically detectable marks along a scan  
line, which device comprises a radiation source for emitting a radiation beam, an objective  
5 system for guiding the radiation beam to the surface, a radiation-sensitive detection system  
for receiving radiation from the surface and an electronic circuit for processing output  
signals of the detection system, characterized in that the detection system comprises eight  
detectors arranged in four quadrants, each quadrant being split at a radius in an inner part  
and an outer part, each detector having an output for providing a detector signal, and in that  
10 the device comprises an electronic circuit for forming a time difference between correspond-  
ing parts of the detector signals relating to passage of the radiation beam over one of the  
marks and for generating from the time difference a focus error signal.

8 Device according to Claim 7, wherein the focus error signal is proportional to  
15

$$(t_{a1} + t_{d1}) + (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) - (t_{b1} + t_{c1})$$

where  $t_e$  is a time difference between corresponding parts of detector signal  $e$  relating to  
passage of the radiation beam over one of the marks and a reference signal, the detector  
20 signals labelled '1' and '2' pertaining to detectors in the outer part and inner part, respec-  
tively of a quadrant, the detectors in four subsequent quadrants being labelled 'a', 'b', 'c'  
and 'd'.

9 A method for scanning a surface comprising optically detectable marks along a scan  
25 line, in which method a radiation beam is guided to the surface, and a radiation-sensitive  
detection system receives radiation from the surface, characterized in that the detection  
system comprises a plurality of detectors, each detector providing a detector signal, and in  
that a time difference is determined between corresponding parts of the detector signals  
relating to passage of the radiation beam over one of the marks and a signal representing a  
30 wavefront deviation of the radiation beam is formed from the time difference.

10 A method for scanning a surface comprising optically detectable marks along a scan  
line, in which method a radiation beam is guided to the surface, and a radiation-sensitive

PHN 16.982

12

15.06.1998

detection system receives radiation from the surface, characterized in that the detection system comprises eight detectors arranged in four quadrants, each quadrant being split at a radius in an inner part and an outer part, each detector providing a detector signal, and in that a time difference is determined between corresponding parts of the detector signals

5 relating to passage of the radiation beam over one of the marks and a focus error signal is formed from the time difference.

11 An optical record carrier for being scanned by an optical system having a predetermined cut-off frequency and having an information layer in which information is stored in

10 the form of optically readable marks arranged in tracks, characterised in that at predetermined parts along the tracks a first pattern of marks and a second pattern of marks are located, the first pattern having a spatial frequency in a range from 0.14 to 0.2 times the cut-off frequency and the second pattern having a spatial frequency in a range from 0.35 to 0.5 times the cut-off frequency.

PHN 16.982

13

15.06.1998

**ABSTRACT:**

An optical scanning device scans a surface (23) provided with marks with a focused radiation beam (35) along a scan line. The device has a radiation-sensitive detection system (39) comprises a plurality of detectors. An electronic circuit (41) determines the time differences between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks. The time differences are used to form a signal representing a primary wavefront aberration of the radiation beam.

Figure 3

1/4

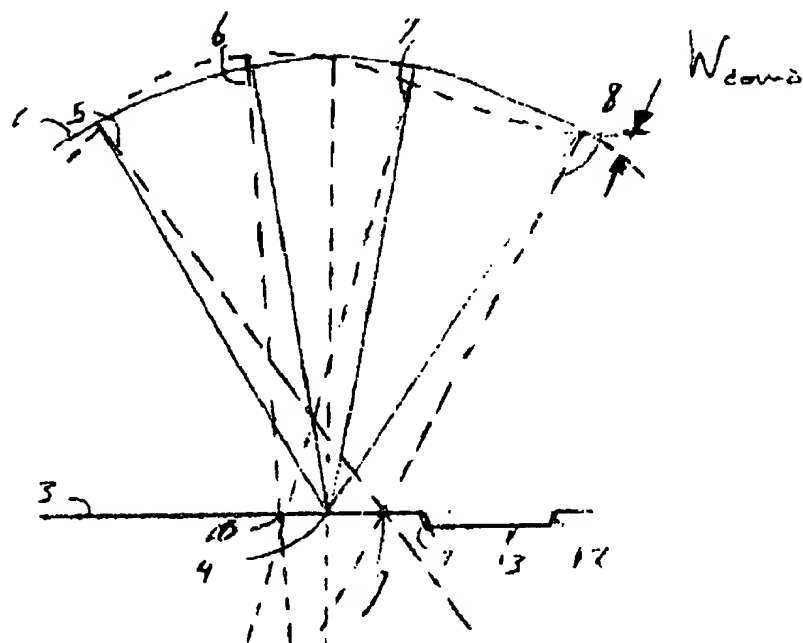


FIG. 1A

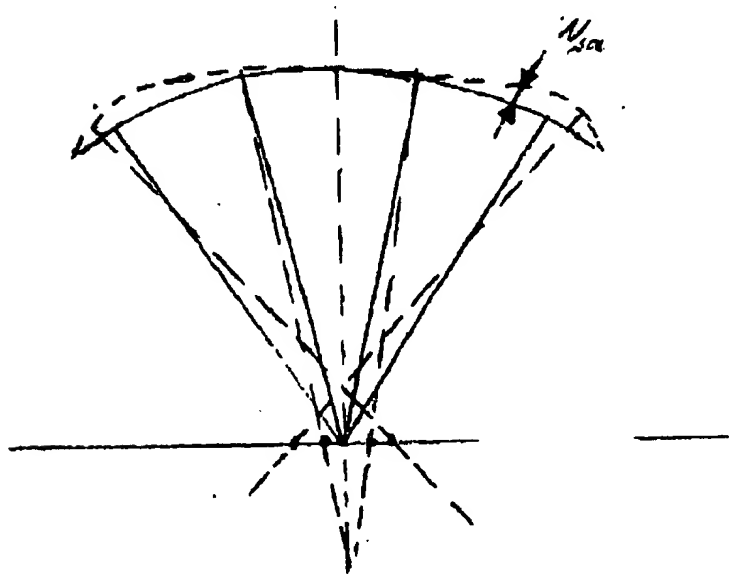


FIG. 1B

2/4

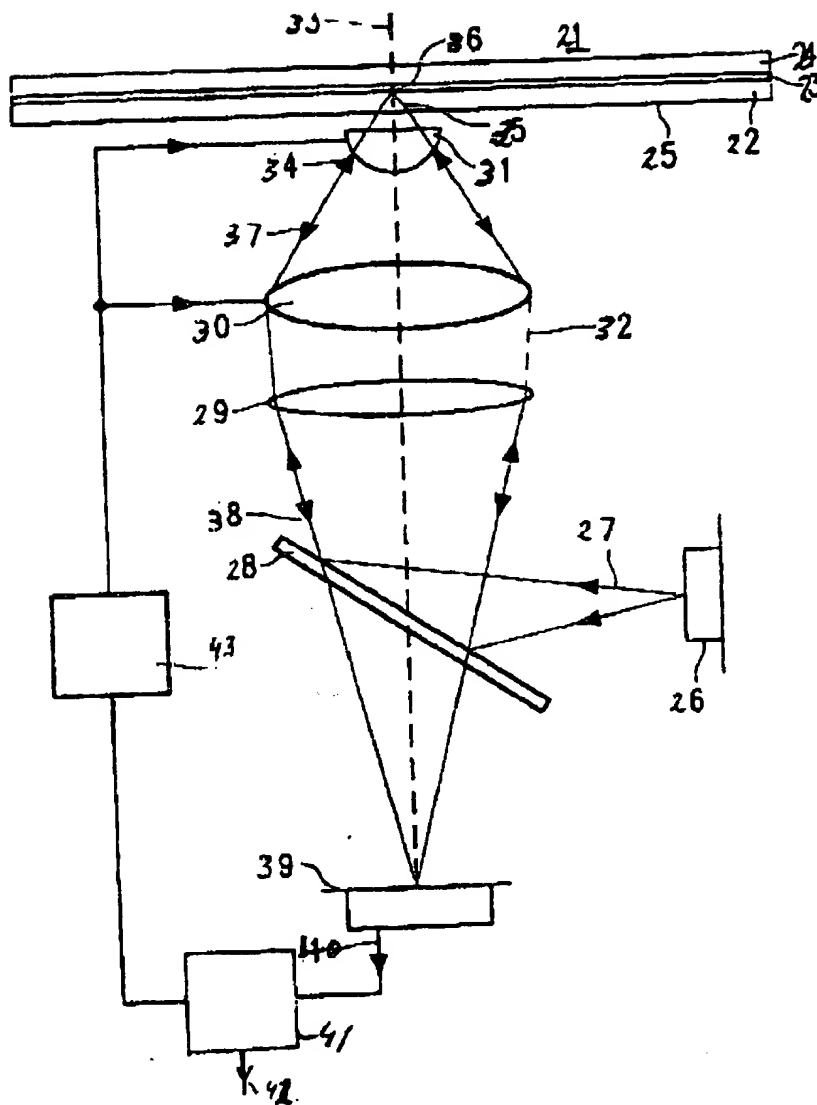


FIG. 2

3/4

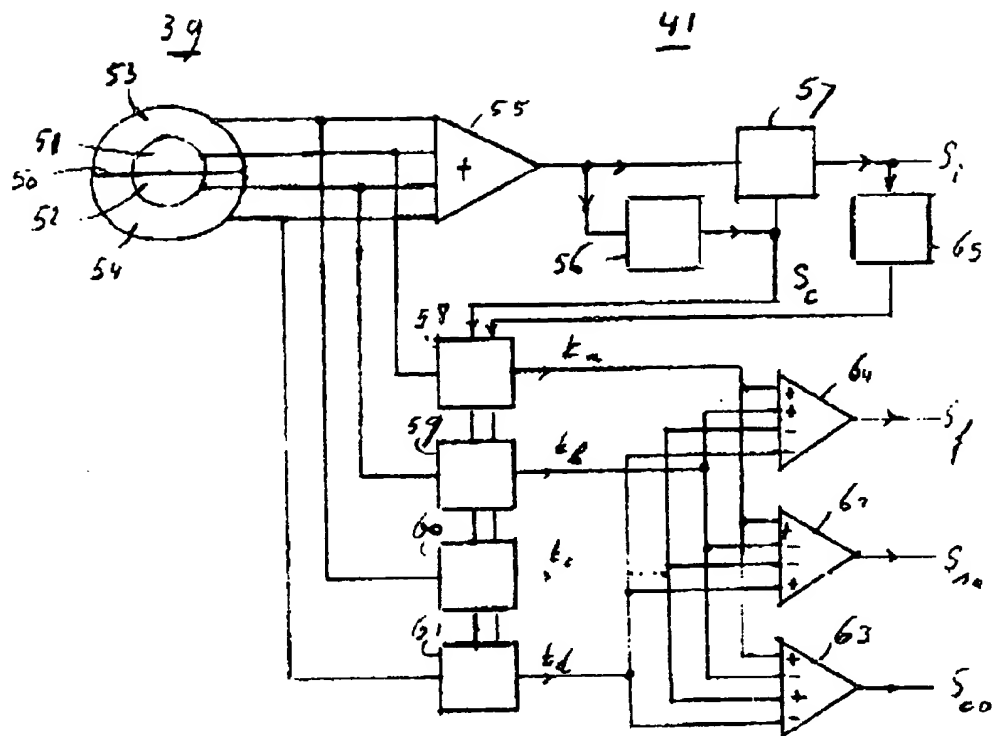


Fig. 3

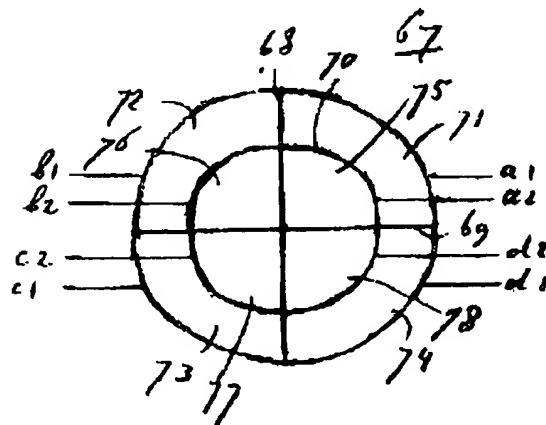


Fig. 4

4/4


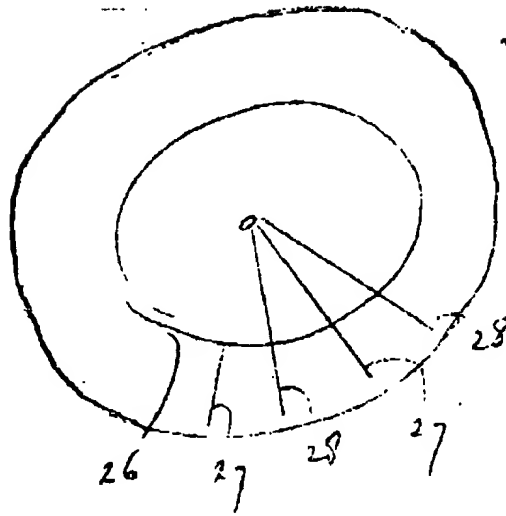


FIG. 5A

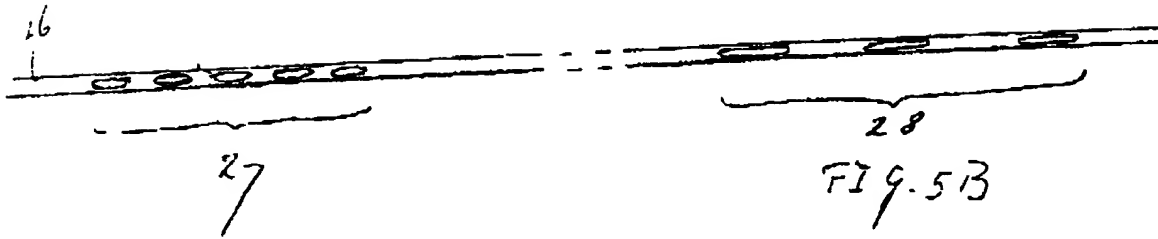

**THIS PAGE BLANK (USPTO)**